




POWER-HYDRAULIK

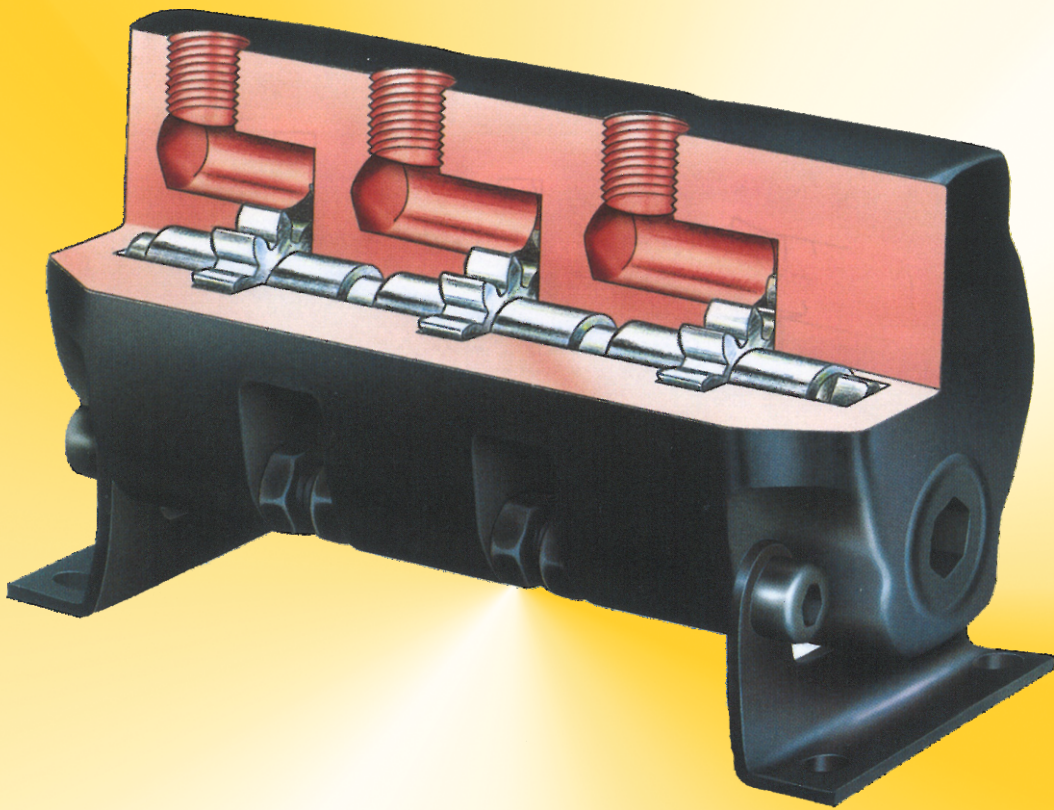

- Equal or proportional division
- Flow rates 2-600 lt/min
- Mobile and Industrial Applications

FLOW DIVIDER

200-Series

- From 2 to 8 sections
- 7 chamber sizes
- Equal and proportional flow rate
- 320 bar
- Inlet flow rate of 2-section devices: 2-40 lt/min.
- 8-section devices: max. 160 lt/min
- Also available with Flange mounting



H / HR-Series

- From 2 to 6 sections
- 5 chamber sizes
- Equal and proportional flow rate
- 420 bar
- Inlet flow rate of 2-section devices: 13-170 lt/min.
- 6-section devices: max. 400 l/min




300-Series

- From 2 to 8 sections
- 5 chamber sizes
- Equal and proportional flow rate
- 320 bar
- Inlet flow rate of 2-section devices: 13-170 lt/min
- 8-section devices: max. 500 lt/min



Manifold with relief valves - for all series

- For use to limit pressure intensification
- Optional anti cavitation valves
- Pipe threads for easy plumbing

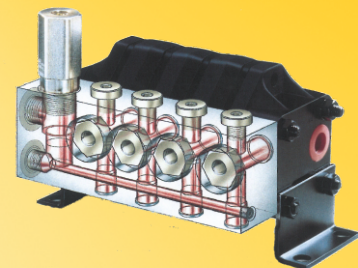

400-Series

- 2 sections
- 2 chamber sizes
- Equal flow rate
- 320 bar
- Inlet flow rate: 77-380 lt/min

